


future vi
future vision
ure vision




in communic
in communications...
munications...

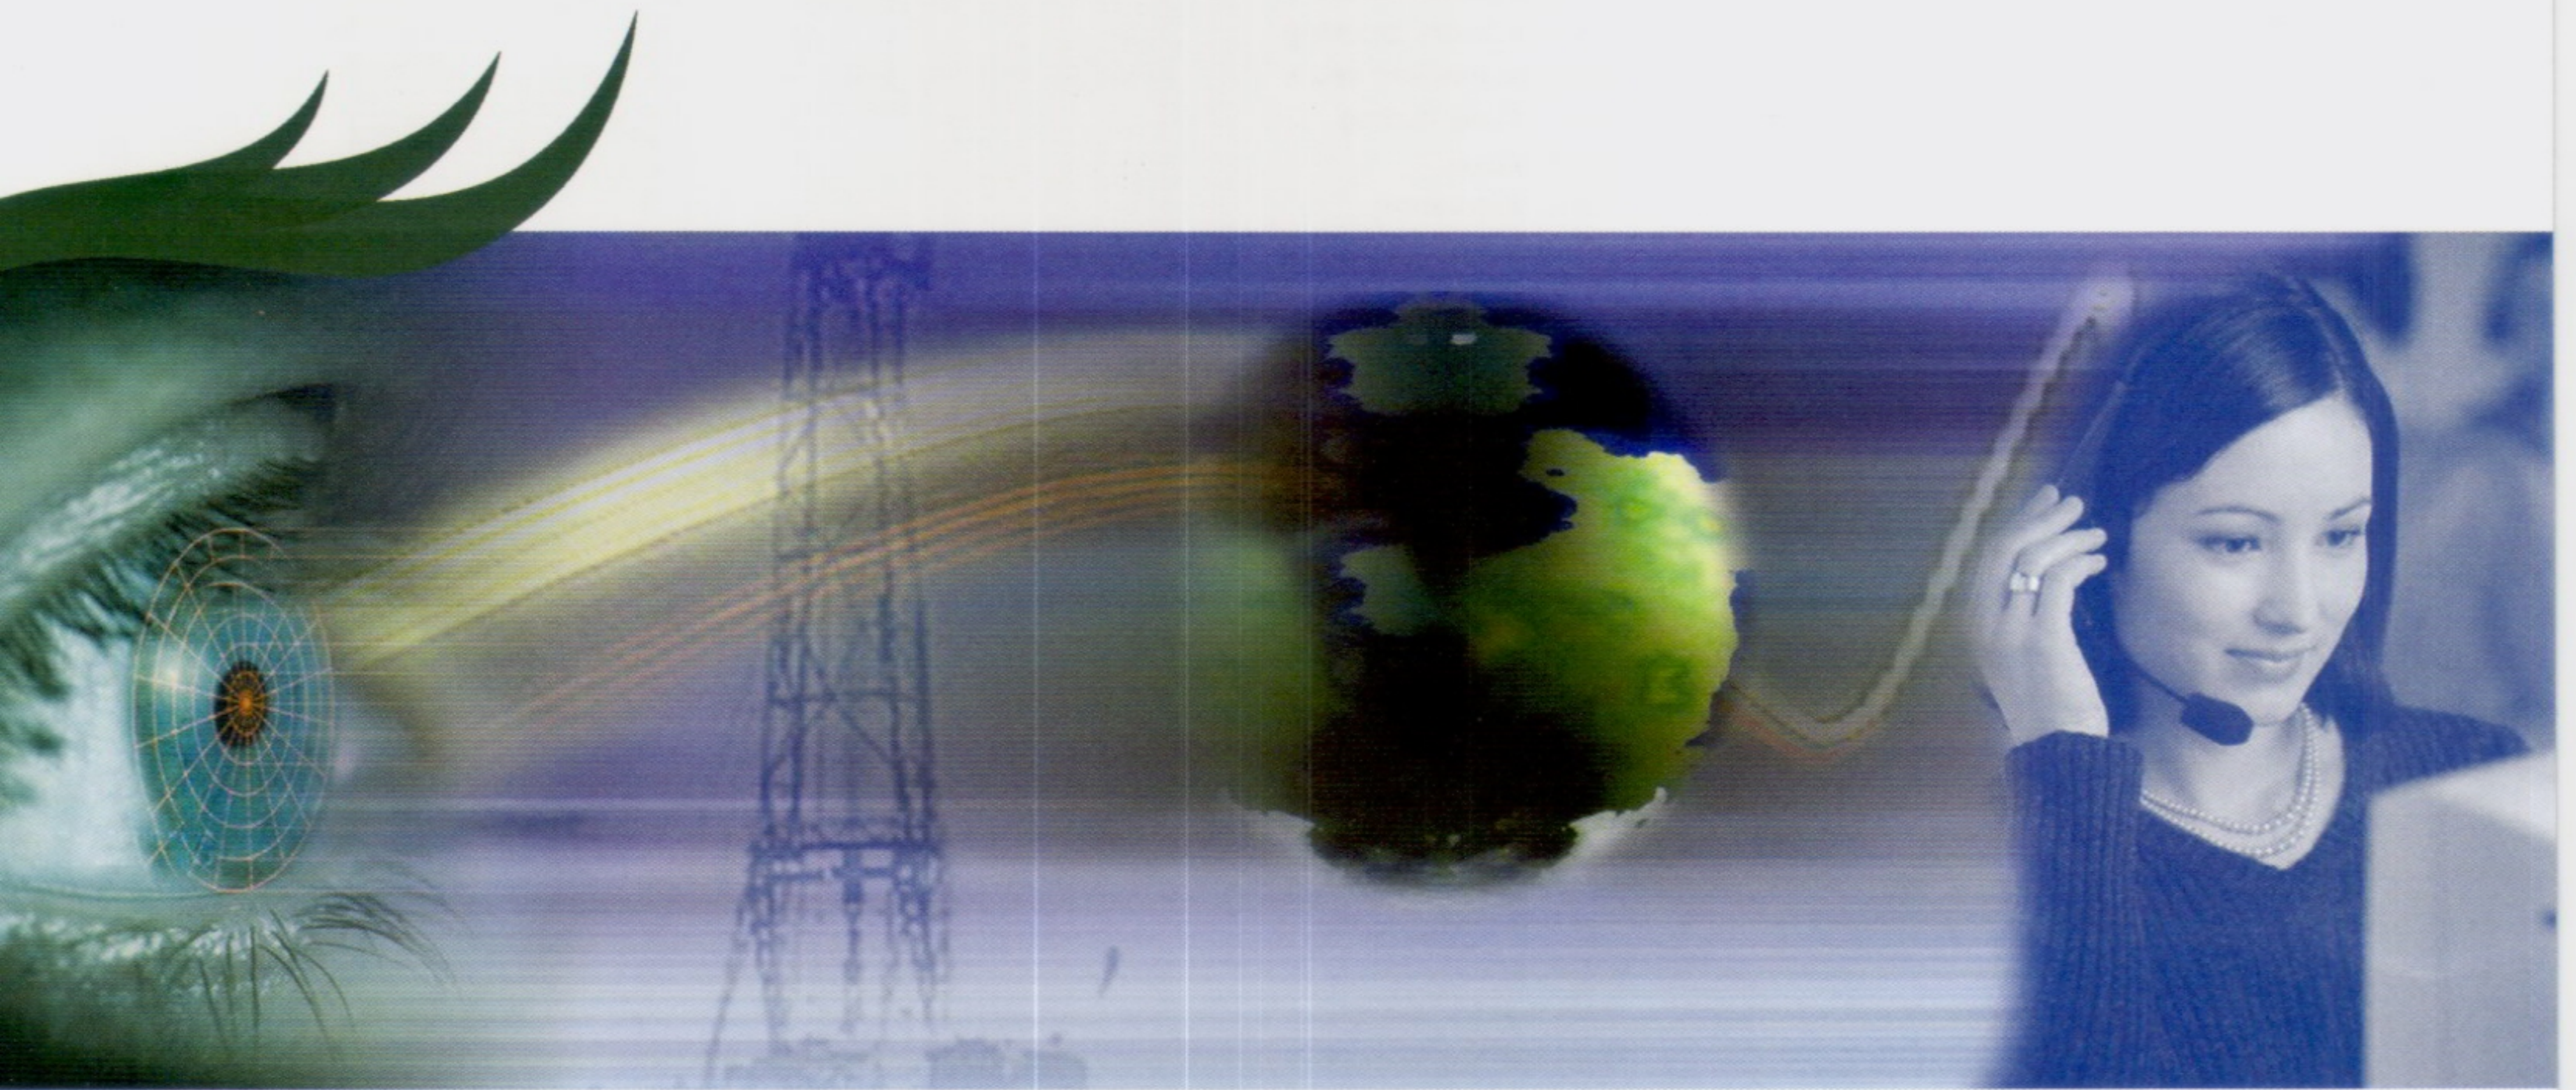

Alpha Pax

HITECH EPABX SYSTEMS

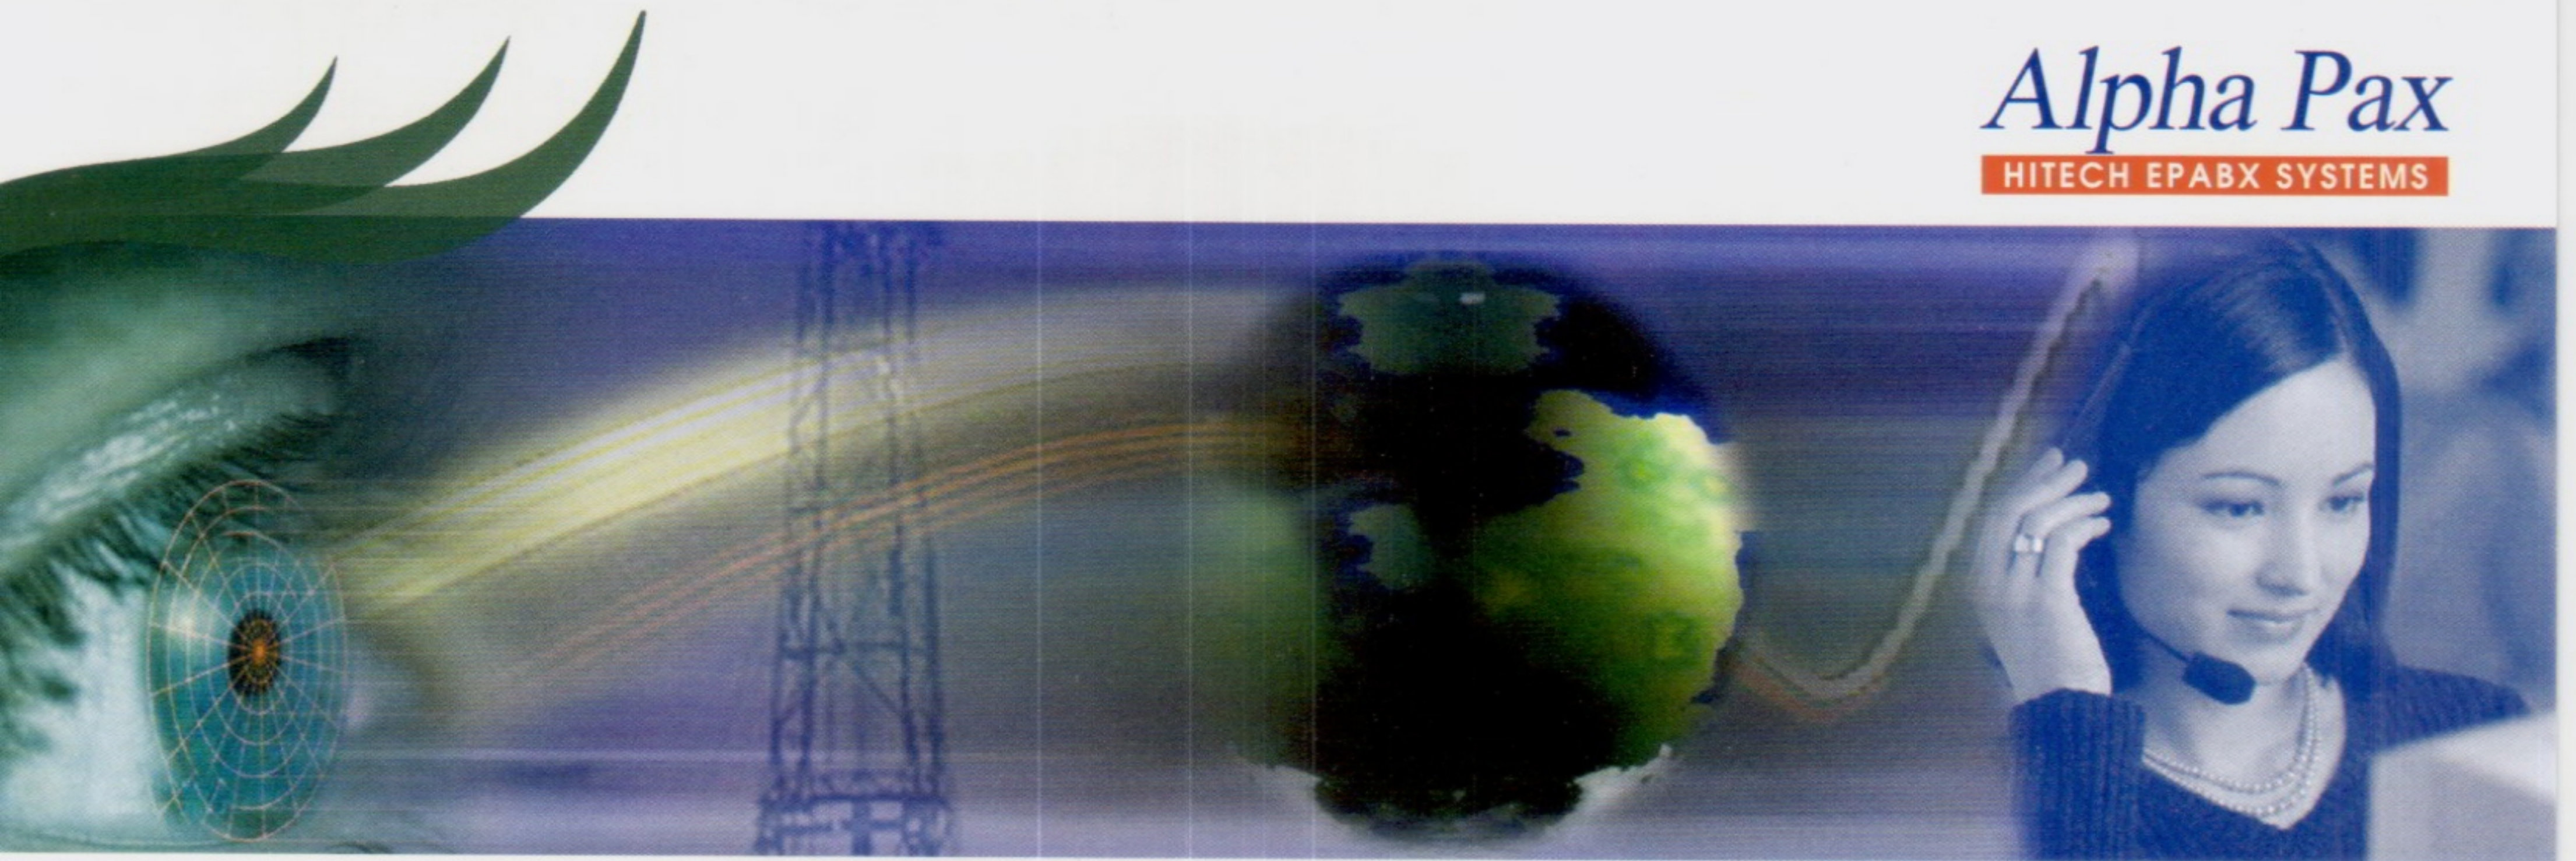

■ Features


- Abbreviated dialing (Personal / Global)
- Alarm call
- Auto call disconnection
- Auto day/night mode
- Auto fax detection
- Auto redial
- Barge in
- Billing options (Units / Rs.)
- Broker call
- Call buffer (Incoming / Outgoing)
- Call camp on
- Call forward (Always / On busy)
- Call parking
- Call pickup
- Call privacy
- Class of service
- Conferencing
- Delayed DID
- Distinctive ringing
- Do not disturb
- Dynamic lock / Auto shut lock
- Emergency reporting
- Executive secretary
- Executive extension
- Extension group
- Extension to extension call
- External call forwarding
- External music
- Flash Timer
- Follow me
- Hot line
- Music on hold
- Night service
- Paging
- Parked call pickup
- Password protection
- Power failure transfer

- Printer interface (Serial / Parallel)
- P&T waiting call pickup
- Ring back when free
- Remote maintenance
- Room to room blocking
- Selective junction seize
- Tone / Pulse dialing
- Trunk group
- Trunk reservation
- Trunk to trunk patch-up
- Visual indication
- (With all standard features)

■ Special Features

- Built in protection circuits
- Call duration warning tone
- Caller ID (Internal / External)
- Caller ID (Auto routing)
- Centrex line compatible
- Computer connectivity with software*
- Denied table
- DISA / DOSA with voice message*
- Flexible numbering
- Forcible disconnection
- Interrupt request
- Meet me on conference*
- Operator console / KTS* phone
- Outgoing restriction after free calls
- Printout (Answered / Un answered / Incoming)
- Reverse call
- Virtual extension
- Walking class of service
- Weekly holidays programming

*Optional

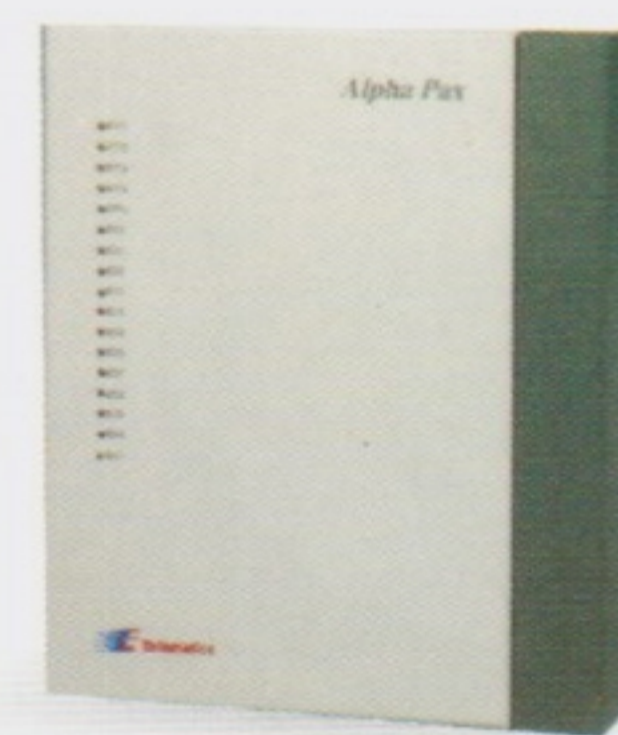

■ Technical Specifications

- CMOS switching
- Cross talk attenuation - >65db
- Dialing pulse - 10pps ± 10%
- Dialing DTMF - CCITT, Q23
- Extension loop - 600 ohms
- Insertion loss - Less 1 db
- MCU based SPC
- Operating Temp - 0 to 45°C, RH 95%
- Operating Voltage 230 volt AC, 50Hz, 24 V DC
- Power Consumption 20 Watts Max.

■ Models

- 206,308
- 308~412
- 308~412~416~616
- 416~816~424~824~432~832